




UNILUX

LUMILIGHT

LUMILIGHT uplighter

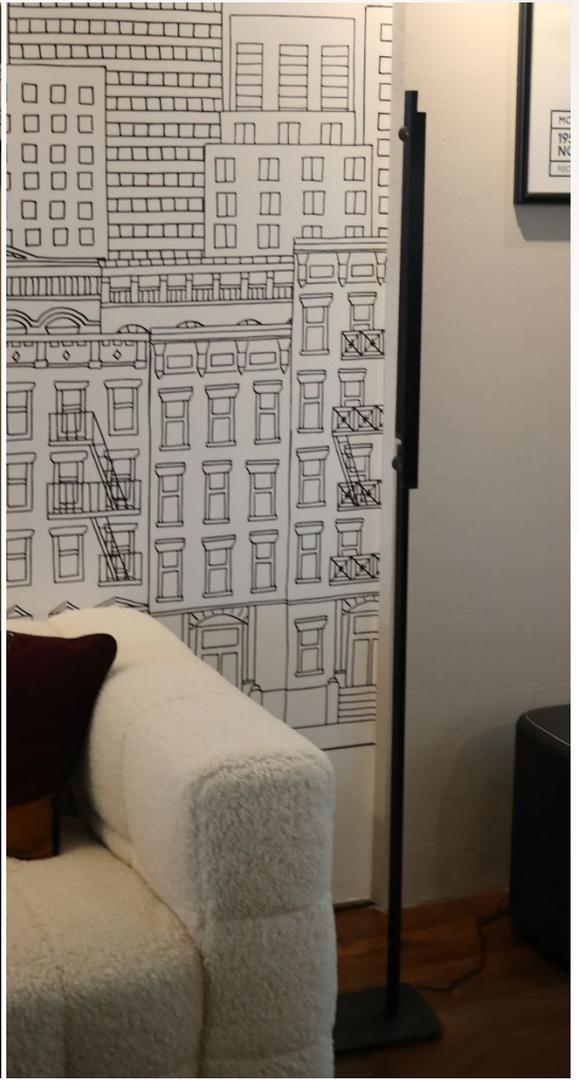

LUMILIGHT uplighter is a new generation of ergonomic luminaires with an innovative design. It offers a wide range of motion thanks to its double articulation and provides quality lighting thanks to its slender head.



- **Innovation:** a new generation of ergonomic uplighters that offers a wide range of movement for quality lighting thanks to its large, long head with an innovative and efficient design.
- **Flexible thanks to its folding arms:** all the joints of the uplighter can be folded at different angles.
- **Variable light intensity and colour temperature:** two touch-switches on the arm allow the light intensity, and another allows the colour temperature to be adjusted in 4 steps
- . Adapt your lighting to your activity (resting, reading, working).
- **A pure and modern design:** LUMILIGHT is distinguished by a design with fine, clean lines. Its head is only 1.7 cm thick, which gives it an elegant character.
- **Finish:** Thanks to its thick base made of high quality steel and its arms entirely made of brushed aluminium, this floor lamp offers beautiful finishes and excellent stability.
- **More space:** once installed, LUMILIGHT will give you the same amount of light as a traditional uplighter while saving more space in your space.


Warranty: 2 years
 Maximum height: 160 cm / minimum height: 120 cm
 Materials: recyclable aluminium/ metal




Professional replaceable light source (LED only)

Characteristics


Measurement in Lux on the worktop view at 35 cm:

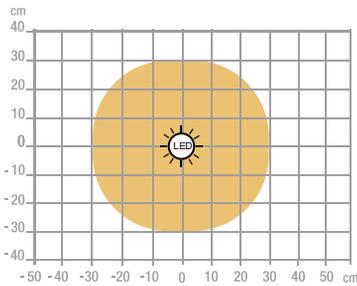

Measurement in Lux on the worktop in profile view at 35 cm:

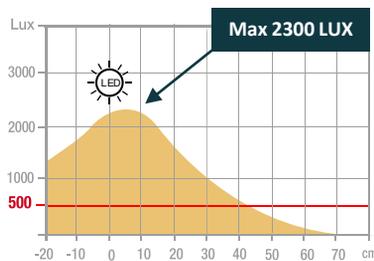

Measurement in nanometers of the light spectrum

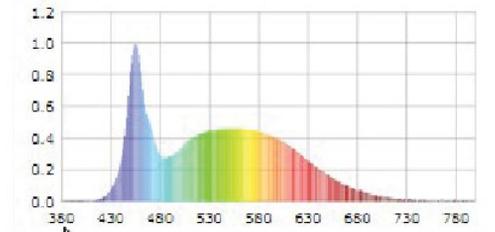


- 0 No-risk
- 1 Low-risk
- 2 Moderate-risk
- 3 High-risk

SAP. code	400177890
EAN code	3595560038725
Colors	Black
Luminous flow (Lm)	2300
Lux at 55 cm (indirect)	2300
Luminous Efficiency (Lm/W)	140
Color T*(K)	3000K/4000K/5000K/6000K
CRI	>80
Source's lifetime (h)	25 000
Energy Consumption (kWh/1000h)	10
Net weight (kg)	3.3

OUR CSR COMMITMENTS

1. All our lighting are **100% repairable** thus limiting planned obsolescence.
2. Reduce our carbon footprint through our **ECO-DESIGN THINKING** approach.
3. Contribute to the preservation of the planet's natural resources by promoting the use of **recycled materials**.
4. Optimize our packaging to control our **transport costs**.
5. Highlight the **talent of our employees** by ensuring social equality.

Energy class

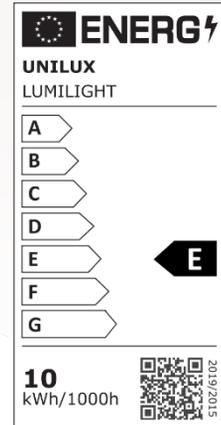


OUR EXPERTISE

1- Floor lamps with direct or indirect lighting: quality lighting that adapts to your activ

Because it's so easy to install, the LUMILIGHT floor lamp with indirect or direct lighting is a versatile luminaire! This floor lamp is ideal for illuminating a specific area of a room, providing an original design that will change the atmosphere of the room.

Thanks to its rotating head, its upward light reverberates off the ceiling and generally acts as a secondary light, ideal if you already have a lamp on your desk, or by directing the light towards the floor, you can use it as a direct light, eliminating the need for a lamp on your desk and saving space on your work surface to make your work more comfortable.

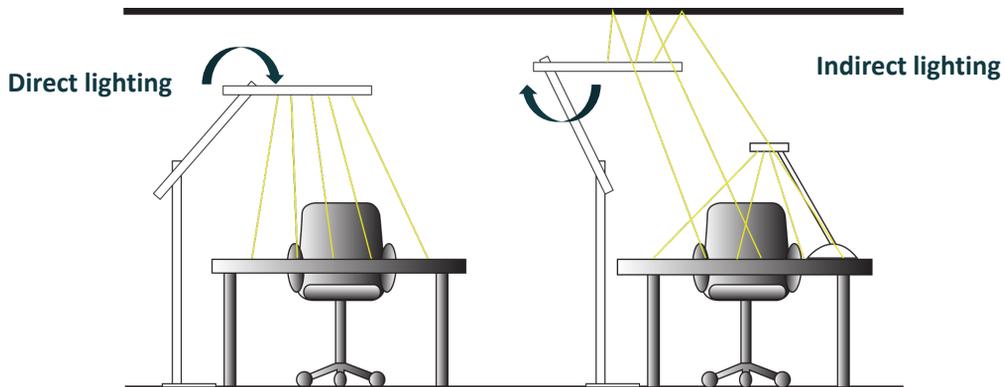

OUR CERTIFICATIONS

Unilux is committed to an eco-responsible approach and ensures that its products respect this commitment. Indeed, we are very concerned about current environmental issues and we aspire to respond as best as possible to the concerns of our consumers on this subject. Sustainable development is at the heart of our strategy and we act for the environment. You will find below the different certifications that Unilux has and that prove its environmental commitment.



* DIN EN 12464-1 (DIN 5035-1): European standard which determines the lighting requirements for workstations in closed places, these satisfying the needs of comfort and visual performance. DIN EN 12464-1 replaced DIN 5035-1

30 products available on pCon Planner

You will be able to obtain data on many UNILUX or OFML standard products and integrate them quickly and easily into 3D space layouts via pCon.



Download on our E-shop

Always available: photos in HD, data sheets, instruction manual, repairability instructions for all our products.



Do you have any questions?

Our after-sales service is always at your disposal

Tèl: +33 1 81 86 06 03

E-mail: contact.unilux@hamelinbrands.com

17 avenue du Parc TECHNOPOLES

91380 Chilly Mazarin – France

Tèl: +33 1 81 86 06 00

www.my-unilyx.com

E-mail: contact.unilux@hamelinbrands.com

UNILUX